


PLAN VIEW

NOTES:

1. LOCATION OF ROCK CONSTRUCTION ENTRANCE IS SHOWN ON THE EROSION AND SEDIMENT CONTROL PLANS.
2. PENNDOT CLASS 4 SEPARATION FABRIC SHALL BE INSTALLED PRIOR TO STONE PLACEMENT.
3. THE THICKNESS OF THE ROCK CONSTRUCTION ENTRANCE SHALL BE CONSTANTLY MAINTAINED TO THE SPECIFIED DIMENSIONS BY ADDING ROCK. A STOCKPILE OF ROCK MATERIAL SHALL BE MAINTAINED ON THE SITE FOR THIS PURPOSE. AT THE END OF EACH WORK DAY, ALL SEDIMENT DEPOSITED ON THE PUBLIC ROADWAY SHALL BE REMOVED AND RETURNED TO THE CONSTRUCTION SITE. WASHING THE ROAD WITH WATER IS NOT PERMITTED.

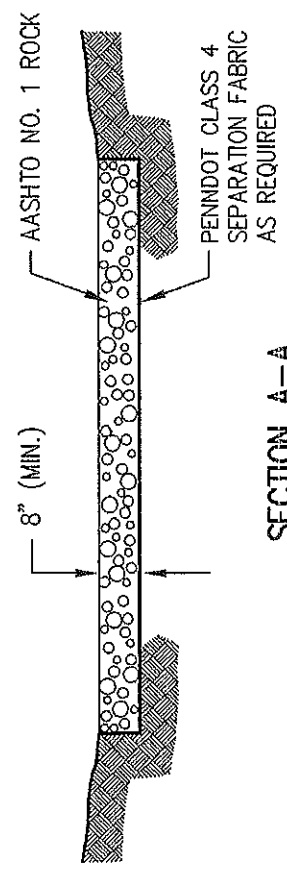

SECTION A-A

ROCK CONSTRUCTION ENTRANCE DETAIL

SCALE: NOT TO SCALE